




Power Up Sequencer

1.0 General Description


This circuit is designed to work as a power up sequencer. It is very useful to control the power up sequence of multiple power supply systems. This also may be used for delayed startup of a power supply. This is especially useful for hot swappable system designs.

Features

- Single chip solutions for most power sequencing applications
- Minimal external components
- Easy selection of startup delay duration
- Easy selection of output pulse polarity
- Predictability and design practicality

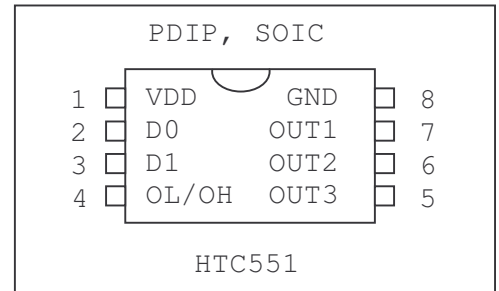

Typical Connection Diagram

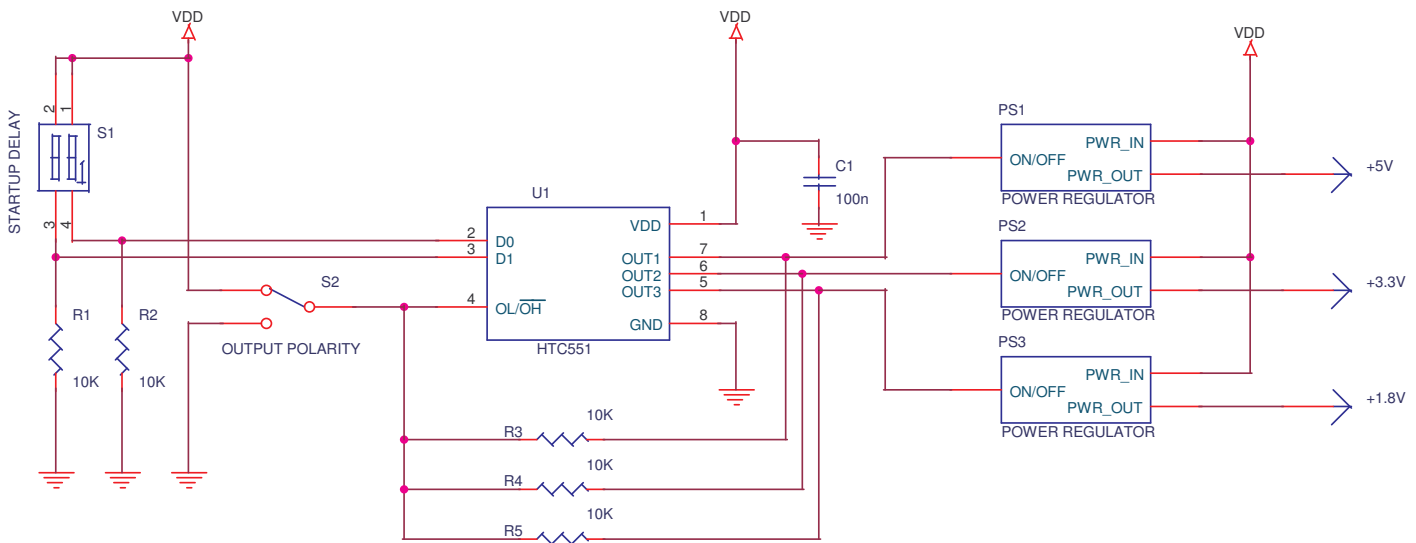

2.0 Functional Description

At power up HTC551 goes through an internal reset which lasts about 18mS. During this time OUT1, OUT2 and OUT3 pins are tri-stated. In order to keep PS1-PS3 from starting up during this period we use R3, R4 and R5 connected to the OL/OH pin of HTC551. The OL/OH pin is an input which determines the internal reset part drives OUT1- OUT3 to the OFF state (polarity is per OH/OL pin) it reads the D[0:1] inputs. D[0:1] inputs determine the startup delay for OUT1-OUT3 control outputs and



can be connected directly to VDD or GND (See startup delay selection table for available delays). After this delay expires OUT1, OUT2 and OUT3, change their states in the following order:

1. OUT1 changes to ON State.
2. Delay for 10mS.
3. OUT2 changes to ON State.
4. Delay for 10mS.
5. OUT3 changes to ON State.
6. Delay for 10mS.

This means that we will have the following power sequencing from the above schematics:

1. PS1 turns on after the startup delay
2. PS2 turns on 10mS after PS1
3. PS3 turns on 10mS after PS3

Please note that S1, S2, R1, R2 and C1 in the schematics above are not necessary for HTC551's functionality.

Pin out Description

Abbreviations used: O - output, I - input, P - power

Pin	Name	I / O	Description	Notes
1	VDD	P	Power	+2.5V to +5.5V
2	D0	I	Startup delay selector D0	Tie it to GND or VDD (see table)
3	D1	I	Startup delay selector D1	Tie it to GND or VDD (see table)
4	OL/OH	I	OUTX ON State selector	VDD –Low on OUTX is in the ON state, GND-High on OUTX is in the ON state
5	OUT3	O	Control output 1	Tie power supply to ON/OFF pin
6	OUT2	O	Control output 1	Tie power supply to ON/OFF pin
7	OUT1	O	Control output 1	Tie power supply to ON/OFF pin
8	GND	P	Ground	Connects to digital ground

Startup Delay verses D[0:1]

Abbreviations used: 0 – connection to GND, 1 – connection to VDD

D1	D0	Startup Delay
0	0	0.5 Second
0	1	1 Second
1	0	2 Second
1	1	3 Second

Please note that those values are for reference only. Actual values vary up to 10% depending upon VDD voltage and operational temperature.



OUTX versus OL/OH

Abbreviations used: 0 – connection to GND, 1 – connection to VDD

OL/OH	OUTX on State
0	HIGH
1	LOW


3.0 Electrical Characteristics

Voltage on VDD pin in respect to GND	+2.5 to +5.5V
Current into VDD pin with no load attached	3 mA ¹
OUTX output source current max	25mA ¹
OUTX output sink current max	25mA ¹
OUTX output low voltage (5mA load)	0.4V ¹
OUTX output low voltage (25mA load)	0.75V ¹
OUTX output high voltage (5mA source)	VDD-0.7V ¹

NOTES:

1. These values are characterized but not tested.


4.0 Ordering Information

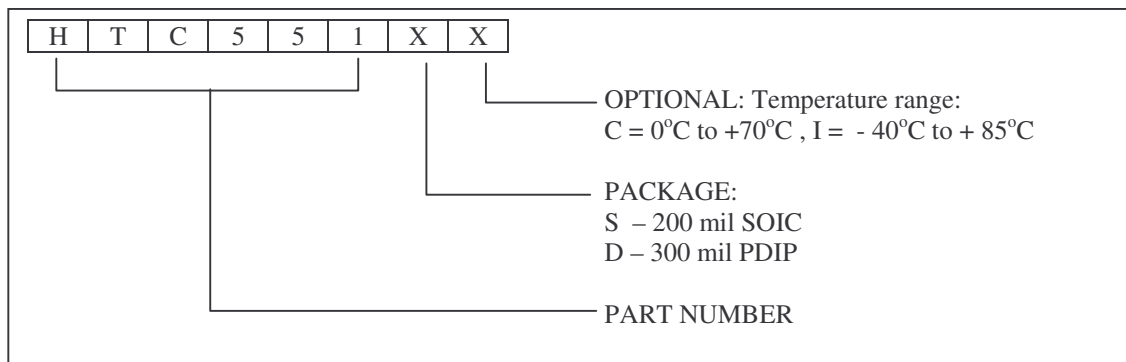



5.0 Mechanical Information

8-Lead Plastic Dual In-line (P) – 300 mil (PDIP)

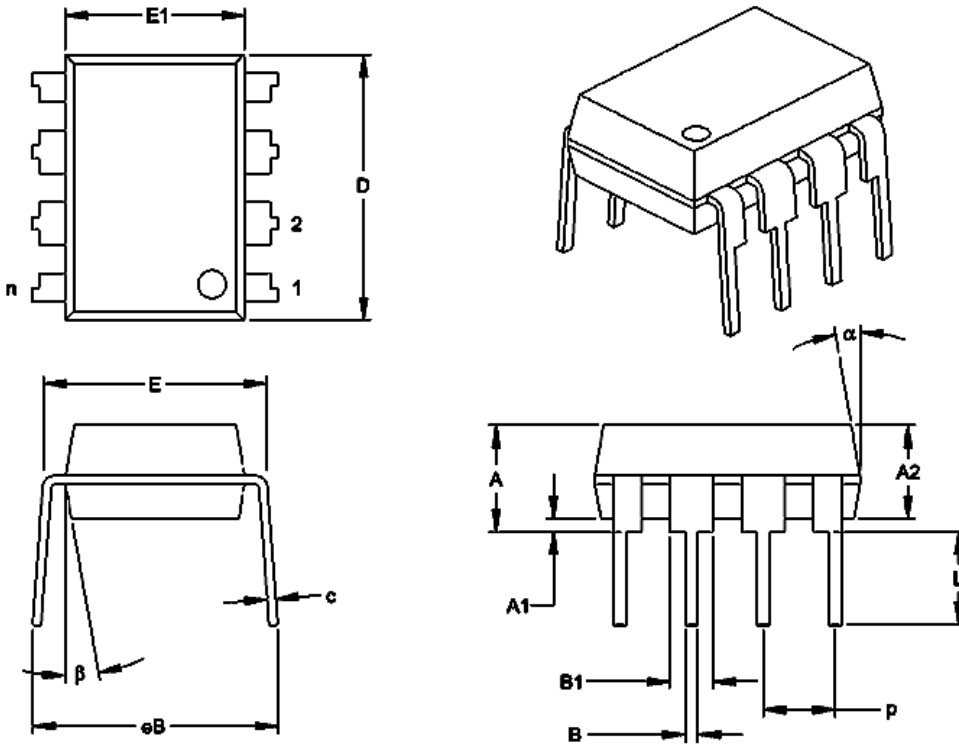

Units		INCHES*			MILLIMETERS		
		MIN	NOM	MAX	MIN	NOM	MAX
Dimension Limits							
Number of Pins	n		8			8	
Pitch	p		.100			2.54	
Top to Seating Plane	A	.140	.155	.170	3.56	3.94	4.32
Molded Package Thickness	A2	.115	.130	.145	2.92	3.30	3.68
Base to Seating Plane	A1	.015			0.38		
Shoulder to Shoulder Width	E	.300	.313	.325	7.62	7.94	8.26
Molded Package Width	E1	.240	.250	.260	6.10	6.35	6.60
Overall Length	D	.360	.373	.385	9.14	9.46	9.78
Tip to Seating Plane	L	.125	.130	.135	3.18	3.30	3.43
Lead Thickness	c	.008	.012	.015	0.20	0.29	0.38
Upper Lead Width	B1	.045	.058	.070	1.14	1.46	1.78
Lower Lead Width	B	.014	.018	.022	0.36	0.46	0.56
Overall Row Spacing	eB	.310	.370	.430	7.87	9.40	10.92
Mold Draft Angle Top	α	5	10	15	5	10	15
Mold Draft Angle Bottom	β	5	10	15	5	10	15

*Controlling Parameter


Notes:

Dimensions D and E1 do not include mold flash protrusions. Mold flash or protrusions shall not exceed .010" (0.254mm) per side.

JEDEC Equivalent:MS-001



8-Lead Plastic Small Outline (SM) – Medium, 208 mil (SOIC)

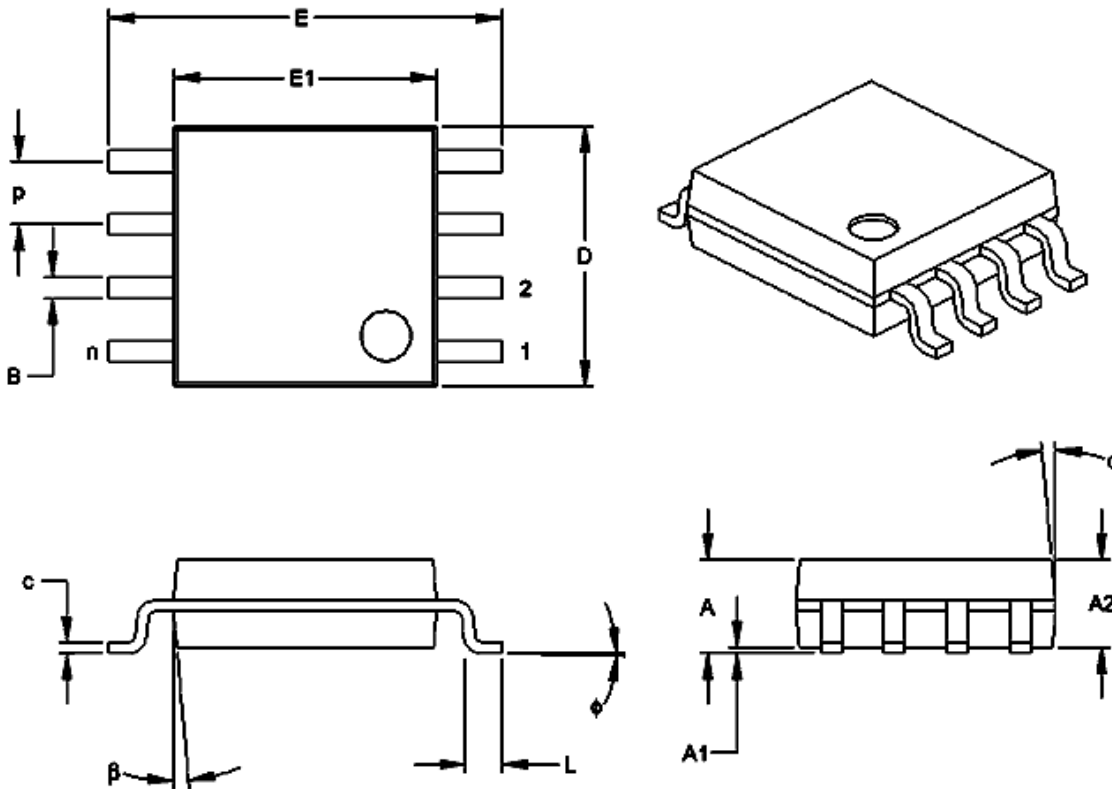

Units		INCHES*			MILLIMETERS		
Dimension Limits		MIN	NOM	MAX	MIN	NOM	MAX
Number of Pins	n		8			8	
Pitch	P		.050			1.27	
Overall Height	A	.070	.075	.080	1.78	1.97	2.03
Molded Package Thickness	A2	.069	.074	.078	1.75	1.88	1.98
Standoff	A1	.002	.005	.010	0.05	0.13	0.25
Overall Width	E	.300	.313	.325	7.62	7.95	8.26
Molded Package Width	E1	.201	.208	.212	5.11	5.28	5.38
Overall Length	D	.202	.205	.210	5.13	5.21	5.33
Foot Length	L	.020	.025	.030	0.51	0.64	0.76
Foot Angle	ϕ	0	4	8	0	4	8
Lead Thickness	c	.008	.009	.010	0.20	0.23	0.25
Lead Width	B	.014	.017	.020	0.36	0.43	0.51
Mold Draft Angle Top	α	0	12	15	0	12	15
Mold Draft Angle Bottom	β	0	12	15	0	12	15

*Controlling Parameter

Notes:

Dimensions D and E1 do not include mold flash protrusions. Mold flash or protrusions shell should not exceed .010" (0.254mm) per side.



HTC makes no warranty, express, statutory implied or by description, regarding the information set forth herein or regarding the freedom of the described devices from patent infringement. HTC makes no warranty, merchantability or fitness for any purposes.

HTC reserves the right to discontinue production and change specifications and prices at any time and without notice. HTC's products are intended for use in commercial applications.

Applications requiring extended temperature range, unusual environmental requirements, or high reliability applications such as military, medical, life-support or life-sustaining equipment, are not recommended without additional processing by HTC for such applications.

High Tech Chips, Inc.

www.hightechips.com

info@hightechips.com